

JC490 U.S. PTO



11/16/00

Assistant Commissioner for Patents  
Washington, D.C. 20231  
Box PATENT APPLICATION

**UTILITY PATENT APPLICATION TRANSMITTAL LETTER**

(Only for nonprovisional applications under 37 CFR 1.53(b))

JC879 U.S. PTO  
09/713909  
11/16/00

Transmitted herewith for filing in the patent application of:

**Peter Mathieson Craig**

Entitled: APPARATUS FOR RELEASING TELEDAPT CABLES  
FROM DEEPLY RECESSED RJ CONNECTORS

Enclosed are:

- ☒ 7 sheets of specification, 3 sheets of claims, 1 sheet of Abstract.  
☒ 2 sheets of formal drawings, Figures 1-9.  
☒ an assignment of an invention to Mitel Corporation (and transmittal therefor).  
☒ a Declaration and Power of Attorney for Patent Application.  
☒ Information Disclosure Statement and PTO-1449

CLAIMS AS FILED				
FOR	NO. FILED	NO. EXTRA	RATE	FEE
TOTAL CLAIMS	11 - 20 =	0	[XX] \$18 LARGE [ ] \$09 SMALL	\$ 0.00
INDEPENDENT CLAIMS	2 - 3 =	0	[XX] \$80 LARGE [ ] \$40 SMALL	\$ 0.00
BASIC FEE [X] LARGE ENTITY \$710 [ ] SMALL ENTITY \$355				
TOTAL FILING FEE				\$ 710.00

☒ A check in the amount of \$ 710.00 to cover the filing fee is enclosed.

☒ The Commissioner is hereby authorized to charge any additional fees which may be required at any time during the prosecution of this application without specific authorization, or credit any overpayment to Deposit Account No. 06-0308.

11-16-00  
Date

Attorney of Record  
James W. McKee  
Reg. No. 26,482  
FAY, SHARPE, FAGAN,  
MINNICH & MCKEE, LLP  
1100 Superior Avenue, Seventh Floor  
Cleveland, Ohio 44114-2518  
(216) 861-5582

**EXPRESS MAIL CERTIFICATE**

I hereby certify that this Utility Patent Application Transmittal Letter and accompanying papers are being deposited with the United States Postal Service "Express Mail Post Office To Addressee" service under 37 C.F.R. 1.10 and is addressed to the Assistant Commissioner For Patents, Box Patent Application, Washington, D.C. 20231 on November 16, 2000. EXPRESS MAIL NO.: EL545794216US

Benjamin Trella

**APPARATUS FOR RELEASING TELEDAPT CABLES FROM DEEPLY  
RECESSED RJ CONNECTORS**

5 This invention relates generally to telephone cable connectors, generally called teledapt cabling.

**BACKGROUND OF THIS INVENTION**

10 The use of teledapt cabling in the telecom industry is widespread, and in many cases the parts are intended to be handled manually for at least connect/disconnect purposes. This exposes the equipment to the potential of static discharge (ESD or electrostatic discharge) between the connector and the person who is connecting or disconnecting the cable manually. This problem can be overcome by recessing the connector in the housing to create a greater air gap between the conductors in the connector and the fingers of the manipulator.  
15 However, this negates the ease of use by requiring some sort of tool or aid to deactivate the locking arm on the teledapt connector to remove the cable (i.e. to release the male connector from the female connector).

20 In the past, ESD requirements were not as high, and the electronic circuitry was designed to withstand the static discharge. Currently, however, many connectors are recessed, reducing the ease of disconnect.

It is therefore evident that the industry requires a teledapt design in which the connectors are recessed, along with some modality allowing the connectors to be easily released from one another without increased risk of ESD.

25 **GENERAL DESCRIPTION OF THIS INVENTION**

More particularly, this invention provides, for use with male and female cooperating teledapt connectors located in a recess with respect to a mounting surface so as to minimize electrostatic discharge between an operator's hand and the connectors, in which the male connector has a main body from which a tongue projects, the tongue being adapted to lie in a groove defined by the female  
30

connector, the tongue defining shoulder means which, when the connectors are connected, come into contact with abutment means formed in the female connector, said contact preventing dislodgement of the connectors until pressure is exerted to move the tongue toward said main body to a sufficient extent to break contact  
5 between said shoulder means and said abutment means:

an actuator having an attachment portion and an operative portion, the attachment portion being adapted to mount the operative portion so that the operative portion extends adjacent the tongue and projects out of the recess far enough to be manipulated so as to move the tongue toward said main body far  
10 enough to break contact between the shoulder means and the abutment means.

Further, this invention provides, in combination:

male and female cooperating teledapt connectors located in a recess with respect to a mounting surface so as to minimize electrostatic discharge between an operator's hand and the connectors,

15 the male connector having a main body from which a tongue projects,  
the female connector defining a groove in which said tongue is adapted to lie,

the tongue defining shoulder means which, when the connectors are connected, comes into contact with abutment means formed in the female connector,  
20 said contact preventing dislodgement of the connectors until the tongue moves toward said main body far enough to break contact between said shoulder means and said abutment means,

and an actuator having an attachment portion and an operative portion, the attachment portion being adapted to mount the operative portion so that the  
25 operative portion extends adjacent the tongue and projects out of the recess far enough to be manipulated manually so as to move the tongue toward said main body far enough to break contact between the shoulder means and the abutment means.

09713909 111600

### **GENERAL DESCRIPTION OF THE DRAWINGS**

Several embodiments of this invention are illustrated in the accompanying drawings, in which like numerals denote like parts throughout the several views, and in which:

5        Figure 1 is a perspective view of a conventional female teledapt connector;

Figure 2 is a perspective view of a male teledapt connector designed to cooperate with the female connector of Figure 1;

Figure 3 is an end elevational view of the female connector of Figure 1, showing the male connector of Figure 2 in section;

10       Figure 4 is a vertical sectional view, taken at the line 4-4 in Figure 3;

Figure 5 is a plan view of a first embodiment of an actuator for use with this invention;

Figure 6 is a plan view of a second embodiment of an actuator;

15       Figure 7 is a vertical sectional view, similar to Figure 4, showing the use of the embodiment of Figure 6;

Figure 8 is a sectional view illustrating a third embodiment of an actuator for use with this invention; and

Figure 9 is a partial plan view of the actuator of Figure 8.

20       Attention is first directed to Figure 1, showing the female connector in a particular embodiment. It is to be stressed that much of the structure illustrated in Figure 1 has to do with mounting the connector in the appropriate environment, and has nothing at all to do with this invention.

25       In Figure 1, the female connector shown generally at 10 is essentially a hollow member having a central opening 12 defined between a rightward wall portion 14, a leftward wall portion 16, a top wall portion 18, and a bottom wall portion 20. The details of the structure of the bottom wall 20 will be provided below.

30       However, attention is first directed to Figure 2, showing the male teledapt connector 22. The connector 22 has a main body 24 generally in the shape of a

09713909 11500

rectangular parallelepiped defined by a forward wall 26, a side wall 28, a bottom wall 30, and the opposite wall for each of these (not visible in Figure 2).

5 A tongue 32 projects from the bottom wall 30 of the male connector 22. The tongue 32 has a relatively narrow end portion 34 and a relatively wide mounting portion 36. The wide mounting portion 36 is formed integrally with, or is otherwise adhered or attached to, the bottom wall 30 of the male connector 22. Between the narrow portion 34 and the wide portion 36, the tongue 32 defines bi-lateral shoulders 38.

10 The male connector shown in Figure 2 has the usual grooves, four shown at 42, which cooperate with free wire contacts in the female member 10. These portions are conventional and play no part in the present invention. It is therefore unnecessary to describe or show them.

Attention is now directed to Figure 1, particularly to the structure of the bottom wall 20, and the lower portion of the side walls 14 and 16.

15 An upwardly open groove 44 is defined between a first short ledge 46 and a second short ledge 48. Each ledge has a vertical inner wall which is substantially parallel to the other. The spacing between the ledges 46 and 48 is such as to receive the narrow portion 34 of the tongue 32 with a small amount of play. Each of the ledges 46 and 48 terminates in an abutment, which in Figure 1 is identified by the numeral 50. In the illustration of Figure 1, the abutments 50 face away from the viewer, and thus are not directly seen.

25 The top surfaces 52 of the ledges 46, 48 are relatively flat and parallel with the bottom wall of the female connector. Further, each top surface 52 meets an upwardly extending wall 54, thus creating an L-shaped flange adapted to receive one side of the wide portion 36 of the tongue 32 relatively snugly, but so as to permit movement of the connectors with respect to each other.

Each side wall has a further ledge 56 on which the corners 60 of the male connector shown in Figure 2 are adapted to rest.

30 It can be visualized that, as the male connector of Figure 2 is inserted (with the end 26 foremost) into the opening 12 of the female connector shown in Figure 1,

09713909 111500

entering from the rightward side (the only way it can enter), the edges 60 will engage the ledges 56, while the wide portion 36 of the tongue 32 will engage the ledges 52, and the narrow portion 34 of the tongue 32 will lie in the groove 44 defined between the side walls of the ledges 46 and 48. When the point is reached, during the insertion of the connector of Figure 2, where the shoulders 38 arrive at the abutments 50, the shoulders 38 will snap down "behind" the abutments 50, and it will not be possible to remove the male connector from the female connector (at least, not by simply pulling on the pieces).

In order to release the connectors from one another, the wide portion 36 adjacent the shoulders 38 must be moved inwardly toward the bottom wall 30. This will raise the shoulders 38 to the point where they are free of the abutments 50. At this point, the male member can be withdrawn outwardly (to the right in Figure 4). Since the connectors are well recessed, it is not possible to simply reach in and force the tongue inwardly against the main body of the male connector 22. Because of the recess, there is no room to do so.

To remedy this problem, there is provided a first embodiment of an actuator 70, the general shape of which is shown in Figure 5. The actuator 70 has an attachment portion 72 which is substantially rectangular, and an operative portion in the form of an elongate strap 74 extending perpendicularly from the mid-region of one rectangular side of the attachment portion. The attachment portion 72 is configured for retention within the female connector 10 with the strap 74 lying between the narrow portion 34 of the tongue 32 and the groove in the female member 10 which receives the tongue. Buttress portions 75 engage the abutments 50, preventing removal of the actuator 70 through the entry side (toward the viewer in Figure 1).

Generally, there is always a certain amount of "play" in terms of vertical movement of the male connector within the female connector, and this "play" is sufficient to permit the presence of the strap 74, so long as it is not too thick.

Figure 4 shows the engagement of the male and female connectors at the bottom of a recess 80 in a mounting surface 81, with the strap 74 extending

09713909 111600

outwardly of the recess 80, so that it can be manipulated. Upward movement of the strap 74 will push the tongue 32 toward the main body of the connector 22, thus breaking contact between the shoulders 38 and the abutments 50, and doing so at a distance from the electrical portion, which is sufficient to restrain ESD.

5        Figure 6 shows a different actuator configuration. Specifically, an actuator 84 has an attachment portion 86, which is substantially rectangular, and which has a rectangular opening 88. An operative portion in the form of an elongate strap 90 extends from the middle of one side of the rectangular attachment portion 86.

10        More particularly, the attachment portion 86 has a first leg 92 remote from the strap 90, a second leg 94 opposed to the leg 92 (and integral with the strap 90), and two side legs 95.

15        Attention is directed to Figure 7, showing the use of the embodiment illustrated in Figure 6. In Figure 7, the attachment portion 86 receives the entire female connector 10 within its opening 88, and extends at an angle in order not to interfere with insertion of the male connector 22 into the female connector 10. It will be noted that the elongate strap 90 is folded over to extend into the female connector and along the groove 44. It will further be noted that the strap 90 extends beyond the front of the opening 80 constituting the recess for the teledaptor.

In both Figures 4 and 7, a printed circuit board 97 is illustrated.

20        Returning briefly to Figure 4, it will be noted that upper and lower components 98 and 99 have been partly illustrated, to represent the context of use. The lowermost component 99 includes an upstanding buttress wall 100 which is intended to prevent removal of the actuator 70 to the left (as pictured in Figure 4). No such buttress is necessary for Figure 7, since the lodgement of the female connector 10 within the opening 88 will serve to keep the strap 90 in place.

25        The actuator 70 may be made of an electrically conductive material, provided ESD is not a concern. Typically, however, the insert would be of a non-electrically conductive material, since ESD is the main reason for considering the placement of the connectors at the bottom of a recess.

09713909 11600

Attention is now directed to Figures 8 and 9, showing a third embodiment of the actuator provided herein.

In these figures, the female connector is illustrated at 110, and a projecting portion of a male connector is shown at 112. The extremity of a tongue 32 is  
5 illustrated, projecting rightwardly out of the female connector 110. A teledapt cable is shown at 114.

Partly shown is a structure 116 representing the portion of a telephone set where the teledapt connection is to be made. The structure 116 has an upstanding tab 118 which cooperates with an actuator 120. The actuator 120 has an attachment  
10 portion 122 which is waisted as can be seen in Figure 9. This provides a neck 124 which sits loosely within a U-shaped groove 126 in the tab 118 and which permits pivoting of the actuator 120. Extending rightwardly from the attachment portion 122 is an operative portion 132, which includes an upstanding bulge portion 134, shown in Figure 8 to be directly adjacent the end of the tongue 32. The rightward  
15 extremity of the operative portion 132 extends out of a recess holding the female connector 110.

It will be evident, particularly from Figure 8, that upward pressure on the rightward end of the operative portion of the actuator 120 will communicate pressure to the tongue 32 and raise it upwardly far enough to release the male and  
20 female connectors from one another.

While several embodiments of this invention have been illustrated in the accompanying drawings and described hereinabove, it will be evident to those skilled in the art that changes and modifications may be made therein, without departing from the essence of this invention, as set forth in the appended claims.

09713909 111500



**THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE  
PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:**

- 5 1. For use with male and female cooperating teledapt connectors located in a recess with respect to a mounting surface so as to minimize electrostatic discharge between an operator's hand and the connectors, in which the male connector has a main body from which a tongue projects, the tongue being adapted to lie in a groove defined by the female connector, the tongue defining shoulder means which, when  
10 the connectors are connected, come into contact with abutment means formed in the female connector, said contact preventing dislodgement of the connectors until pressure is exerted to move the tongue toward said main body to a sufficient extent to break contact between said shoulder means and said abutment means:

an actuator having an attachment portion and an operative portion, the  
15 attachment portion being adapted to mount the operative portion so that the operative portion extends adjacent the tongue and projects out of the recess far enough to be manipulated so as to move the tongue toward said main body far enough to break contact between the shoulder means and the abutment means.

- 20 2. In combination:

male and female cooperating teledapt connectors located in a recess with respect to a mounting surface so as to minimize electrostatic discharge between an operator's hand and the connectors,

the male connector having a main body from which a tongue projects,  
25 the female connector defining a groove in which said tongue is adapted to lie,

the tongue defining shoulder means which, when the connectors are connected, come into contact with abutment means formed in the female connector, said contact preventing dislodgement of the connectors until the tongue moves

09713909 111600

toward said main body far enough to break contact between said shoulder means and said abutment means,

and an actuator having an attachment portion and an operative portion, the attachment portion being adapted to mount the operative portion so that the  
5 operative portion extends adjacent the tongue and projects out of the recess far enough to be manipulated manually so as to move the tongue toward said main body far enough to break contact between the shoulder means and the abutment means.

3. The invention claimed in claim 1, in which the attachment portion of the  
10 actuator is substantially rectangular, and in which the operative portion is an elongate strap which extends perpendicularly from one rectangular side of the attachment portion.

4. The invention claimed in claim 3, in which the attachment portion of the  
15 actuator is configured for lodgement within the female connector and includes contact means for contacting said abutment means, thereby preventing removal of the actuator in the direction in which the elongate strap projects.

5. The invention claimed in claim 2, in which the attachment portion of the  
20 actuator is pivotally mounted adjacent to the female connector.

6. The combination claimed in claim 2, in which the attachment portion of the actuator is configured for lodgement within the female connector and includes contact means for contacting said abutment means, thereby preventing removal of  
25 the actuator in the direction in which the operative portion projects, the combination further including mounting means for the female connector, the mounting means including buttress means adjacent the female connector at a location opposite the direction in which the operative portion projects, the buttress means preventing the removal of the actuator in the direction opposite the direction in which the operative  
30 portion projects.

7. The invention claimed in claim 2, in which the attachment portion of the actuator has an opening configured to receive the female connector with the operative portion in folded over to extend into the female connector and along the groove.
8. The invention claimed in claim 1, in which the actuator is made of an electrically conductive material.
9. The invention claimed in claim 1, in which the actuator is made of an electrically non-conductive material.
10. The invention claimed in claim 2, in which the actuator is made of an electrically conductive material.
11. The invention claimed in claim 2, in which the actuator is made of an electrically non-conductive material.

## **ABSTRACT OF THE DISCLOSURE**

There is provided, in combination, male and female cooperating teledapt connectors located in a recess with respect to a mounting surface so as to  
5 minimize electrostatic discharge between an operator's hand and the connectors, wherein the male connector has a main body from which a tongue projects, and the female connector defines a groove in which the tongue is adapted to lie. The tongue has shoulders which, when the connectors are put together, come into contact with abutments formed in the female connector, such contact preventing release of the  
10 connectors until pressure is exerted to move the tongue toward the main body and thus to break contact between the shoulders and the abutments. The key to achieving this is the provision of an actuator having an attachment portion and an operative portion, the attachment portion being adapted to mount the operative portion so that the operative portion extends adjacent the tongue and projects out of  
15 the recess far enough to be manipulated so as to move the tongue toward said main body far enough to break contact between the shoulder means and the abutment means.

FIG. 1. (PRIOR ART)

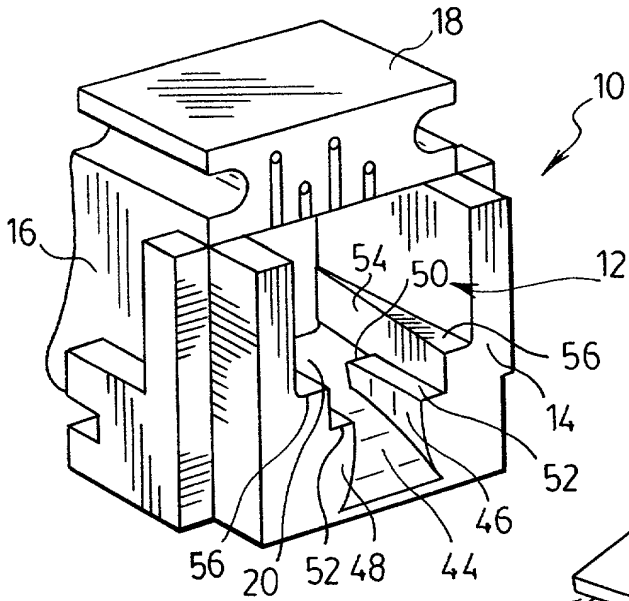


FIG. 2. (PRIOR ART)

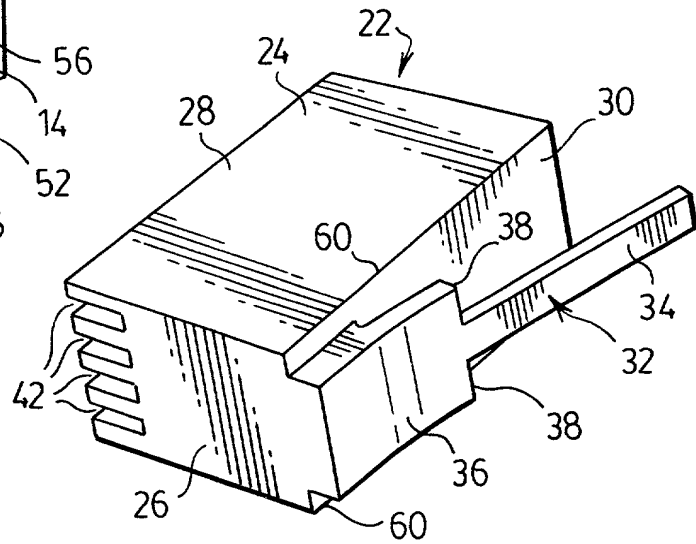


FIG. 3.

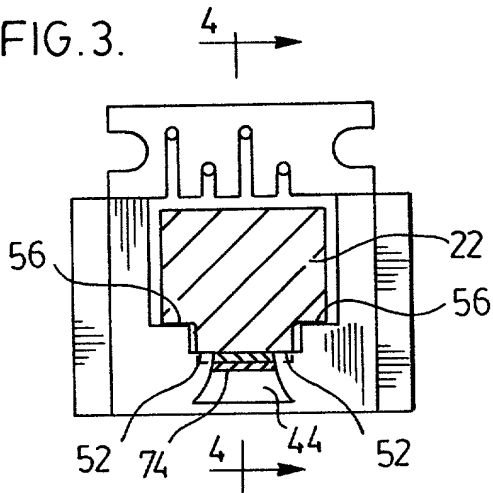


FIG. 4.

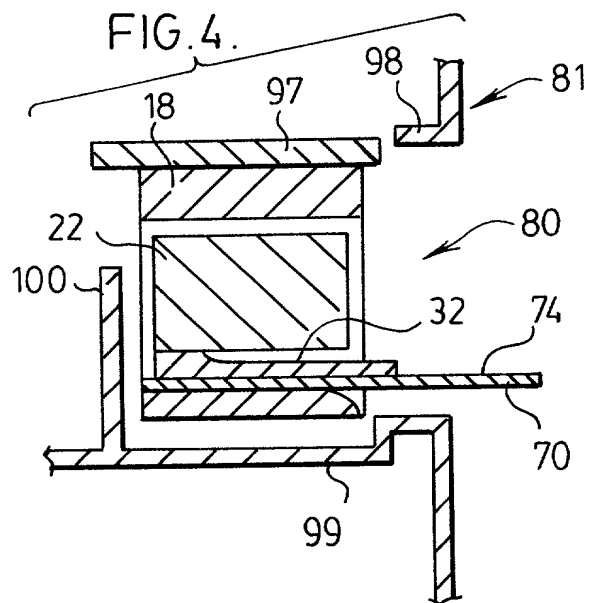


FIG. 5.

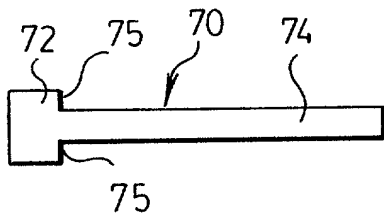


FIG. 6.

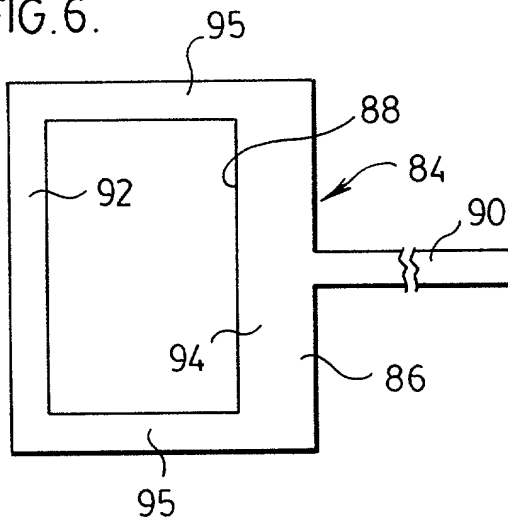


FIG. 7.

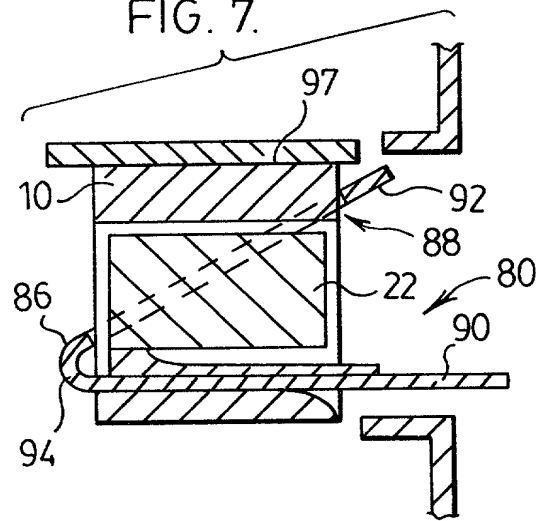


FIG. 8.


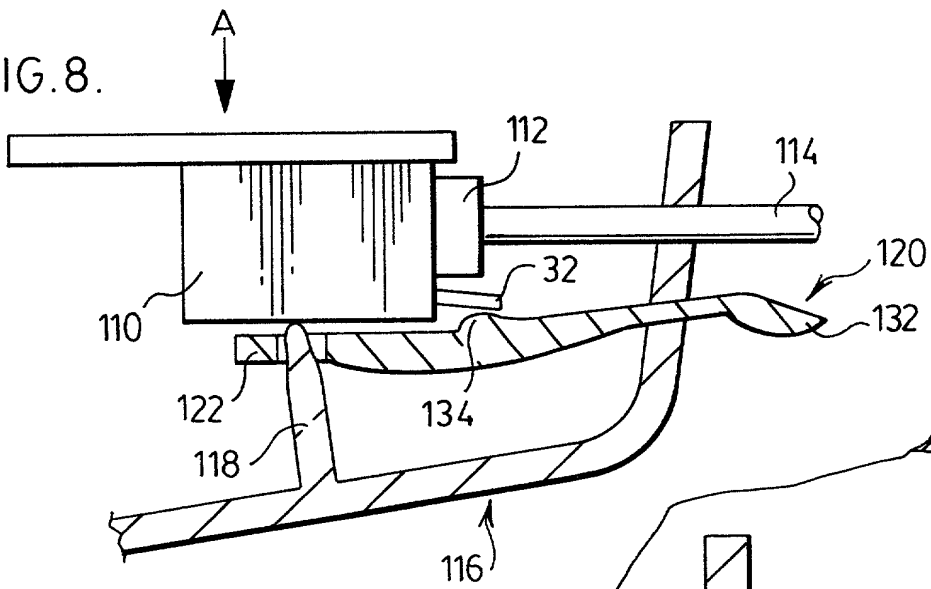


FIG. 9.

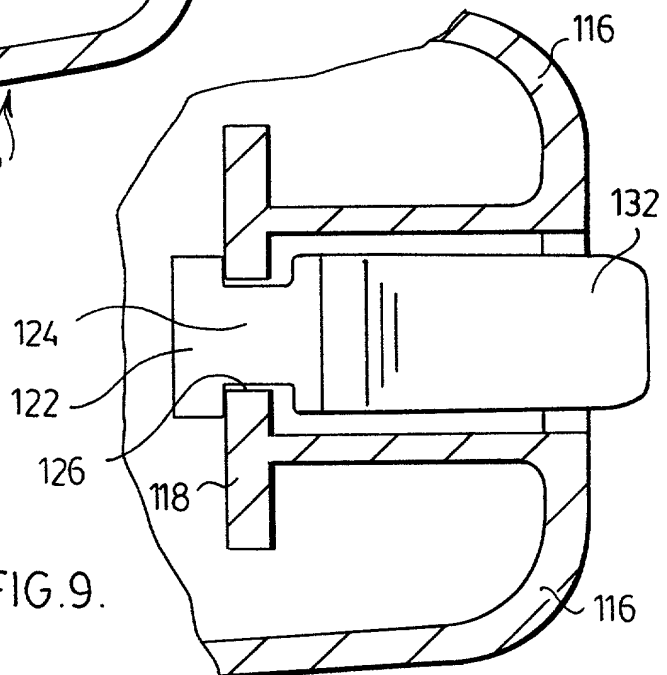

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first, and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

APPARATUS FOR RELEASING TELEDAPT CABLES FROM DEEPLY RECESSED RJ CONNECTORS

the specification of which:

XX is attached hereto, or

— was filed on \_\_\_\_\_ as  
Application Serial No. \_\_\_\_\_ and was  
amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, code of Federal Regulations, § 1.56 (a).

I hereby claim foreign priority benefits under Title 35, United States Code §119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

UK Application No. 9926945.8 filed November 16/99 (if applicable)

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below:

\_\_\_\_\_ (if applicable)

I hereby claim the benefit under Title 35, United States, § 120 of any United States application(s) or any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information which is material to patentability as defined in Title 37, of Federal Regulations Code, § 1.56(a) which became available between the filing date of the prior application and the national or PCT international filing date of this application:

\_\_\_\_\_ (if applicable)

09713909.111500

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

James W. McKee	Reg. No. 26,482
Timothy E. Nauman	Reg. No. 32,283
Scott A. McCollister	Reg. No. 33,961
R. Scott Speroff	Reg. No. 37,450

Please direct all correspondence and telephone calls to:

James W. McKee  
Fay, Sharpe, Beall, Fagan,  
Minnich & McKee, LLP  
1100 Superior Avenue, 7th Floor  
Cleveland, OH 44114-2518

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both under § 1001 of Title 18 of the United States code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full name of sole or first joint inventor: Peter Mathieson CRAIG

Inventor's Signature: *P. Mathieson*

Date: 6th Nov 2000

Residence: Kanata, Ontario

Country of Citizenship: CANADA

Post Office Address: 7 Naismith Crescent

Kanata, Ontario K2L 2K7 Canada

Full name of second joint inventor: \_\_\_\_\_  
(if applicable)

Inventor's Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Residence: \_\_\_\_\_

Country of Citizenship: \_\_\_\_\_

Post Office Address: \_\_\_\_\_

09713009 111600